



# HandySCAN3D ™

BLACK Series  
**THE TRULY PORTABLE  
METROLOGY-GRADE  
3D SCANNERS**



WATCH PRODUCT VIDEO



reddot award 2019  
winner

# HandySCAN3D™


## WHEN ACCURACY MEETS VERSATILITY AND PORTABILITY

The HandySCAN 3D™ line-up is the industry standard in portable metrology-grade 3D scanners and a proven and trusted patented technology. Optimized to meet the needs of design, manufacturing and metrology professionals, the BLACK Series provides the most effective and reliable way to acquire accurate 3D measurements of physical objects anywhere.

Portable, accurate and simple to use, the HandySCAN 3D | BLACK Series features unmatched speed that captures high-quality measurements. Since it performs regardless of environment changes or part movement, it represents the ideal tool for quality assurance and product development applications.



**ACCURACY OF**  
0.025 mm (0.0009 in)



**SCAN-TO-MESH**  
IN SECONDS



**CERTIFIED**  
ISO 17025



**WORLDWIDE**  
SUPPORT



**LARGE**  
SCANNING AREA



**PATENTED**  
TECHNOLOGY



- 1 High-performance optics  
Optimal scan quality
- 2 Extra single line  
Easy capture of hard-to-reach areas
- 3 Blue laser technology  
High resolution capability
- 4 Stand-off distance  
color indicator  
Maximizes scanning performance
- 5 Multifunction buttons  
Quick access to frequently used  
software functionalities
- 6 Highly ergonomic  
and sleek design  
Provides outstanding  
user experience



### ACCURACY & RESOLUTION

The HandySCAN 3D | BLACK Series delivers accurate, high-resolution and repeatable results, regardless of the measurement setup quality and no matter the user experience. Featuring dynamic referencing, both the scanner and part can move during measurement and still provide an accurate and high-quality scan.

**Accuracy**  
0.025 mm (0.0009 in)

**Volumetric accuracy**  
0.020 + 0.040 mm/m (0.0008 in + 0.0005 in/ft)

**Reliable acceptance test**  
Based on VDI/VDE 2634 part 3 standard  
ISO 17025 accredited laboratory

**High resolution for fine details**

**High accuracy on large measurements**  
Integrated photogrammetry process and bundle adjustment optimisation

**Integrated photogrammetry**  
High accuracy on large measurements with volumetric accuracy optimization



### PORTABILITY


This handheld 3D scanner is a stand-alone device that does not require a tripod nor any external tracking device to operate. Fitting in a small suitcase, it can be brought anywhere and used in any environmental conditions without affecting its performance.

**Lightweight**  
0.94 kg (2.1 lb)

**Dynamic referencing**  
Both the object and scanner can be moved freely while scanning

**Fits into a suitcase**

**Take it anywhere you need**

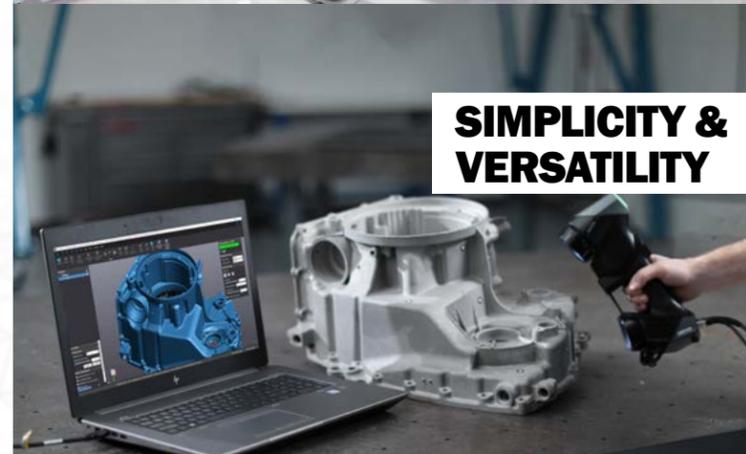

### SIMPLICITY & VERSATILITY

With its user-friendly interface and ergonomic design, this 3D measurement solution has a short learning curve. Highly versatile, it can be used to scan various object sizes and surface types in real time—all with the same device.

**Plug and play**

**Simple user interface and real-time mesh visualization**

**Single device fits all needs**

**Masters complex and difficult surfaces**



### SPEED

The HandySCAN 3D | BLACK Series scanner features multiple laser crosses and an automatic mesh generation, enabling a faster workflow from the set-up to the scan and then to the file!

**Instant mesh**  
Ready-to-use files

**High measurement rate**  
Up to 1,300,000 measurements/s

**11 laser crosses scanning area**

**Quick set-up**  
Up and running in less than 2 minutes

# TECHNICAL SPECIFICATIONS

Innovating technology that provides accuracy, simplicity, portability as well as real speed to your metrology-grade applications.

	HandySCAN BLACK™	HandySCAN BLACK™ Elite
<b>ACCURACY</b> <sup>(1)</sup>	0.035 mm (0.0014 in)	0.025 mm (0.0009 in)
<b>VOLUMETRIC ACCURACY</b> <sup>(2)</sup> (based on part size)	0.020 mm + 0.060 mm/m (0.0008 in + 0.0007 in/ft)	0.020 mm + 0.040 mm/m (0.0008 in + 0.0005 in/ft)
<b>VOLUMETRIC ACCURACY WITH MaxSHOT Next™ Elite</b> <sup>(3)</sup>	0.020 mm + 0.015 mm/m (0.0008 in + 0.00018 in/ft)	
<b>MEASUREMENT RESOLUTION</b>	0.025 mm (0.0009 in)	
<b>MESH RESOLUTION</b>	0.100 mm (0.0039 in)	
<b>MEASUREMENT RATE</b>	800,000 measurements/s	1,300,000 measurements/s
<b>LIGHT SOURCE</b>	7 blue laser crosses	11 blue laser crosses (+ 1 extra line)
<b>LASER CLASS</b>	2M (eye safe)	
<b>SCANNING AREA</b>	310 x 350 mm (12.2 x 13.8 in)	
<b>STAND-OFF DISTANCE</b>	300 mm (11.8 in)	
<b>DEPTH OF FIELD</b>	250 mm (9.8 in)	
<b>PART SIZE RANGE</b> (recommended)	0.05–4 m (0.15–13 ft)	
<b>SOFTWARE</b>	VXelements	
<b>OUTPUT FORMATS</b>	.dae, .fbx, .ma, .obj, .ply, .stl, .txt, .wrl, .x3d, .x3dz, .zpr, .3mf	
<b>COMPATIBLE SOFTWARE</b> <sup>(4)</sup>	3D Systems (Geomagic® Solutions), InnovMetric Software (PolyWorks), Metrologic Group (Metrolog X4), New River Kinematics (Spatial Analyzer), Verisurf, Dassault Systèmes (CATIA V5, SOLIDWORKS), PTC (Creo), Siemens (NX, Solid Edge), Autodesk (Inventor, PowerINSPECT)	
<b>WEIGHT</b>	0.94 kg (2.1 lb)	
<b>DIMENSIONS</b> (LxWxH)	79 x 142 x 288 mm (3.1 x 5.6 x 11.3 in)	
<b>CONNECTION STANDARD</b>	1 X USB 3.0	
<b>OPERATING TEMPERATURE RANGE</b>	5–40°C (41–104°F)	
<b>OPERATING HUMIDITY RANGE</b> (non-condensing)	10–90%	
<b>CERTIFICATIONS</b>	EC Compliance (Electromagnetic Compatibility Directive, Low Voltage Directive), compatible with rechargeable batteries (when applicable), IP50, WEEE	
<b>PATENTS</b>	CA 2,600,926, CN 200680014069.3, US 7,912,673, CA 2,656,163, EP (FR, UK, DE) 1,877,726, AU 2006222458, US 8,032,327, JP 4,871,352, US 8,140,295, EP (FR, UK, DE) 2,278,271, EP (FR, UK, DE) 2,230,482, IN 266,573, US 7,487,063, CA 2,529,044, EP (FR, UK, DE) 3,102,908, US 15/114,563, CN 201580007340X	

(1) HandySCAN BLACK and HandySCAN BLACK|Elite (ISO 17025 accredited): Based on VDI/VDE 2634 part 3 standard. Probing error performance is assessed with diameter measurements on traceable sphere artefacts.

(2) HandySCAN BLACK and HandySCAN BLACK|Elite (ISO 17025 accredited): Based on VDI/VDE 2634 part 3 standard. Sphere-spacing error is assessed with traceable length artefacts by measuring these at different locations and orientations within the working volume. Results are obtained using integrated photogrammetry with volumetric accuracy optimization.

(3) The volumetric accuracy of the system when using a MaxSHOT 3D cannot be superior to the default accuracy for a given model.

(4) Also compatible with all major metrology, CAD, and computer graphic software through mesh and point cloud import.



**Creaform Inc. (Head Office)**  
 4700 rue de la Pascaline  
 Lévis QC G6W 0L9 Canada  
 T.: 1 418 833 4446 | F.: 1 418 833 9588

[creaform.info@ametek.com](mailto:creaform.info@ametek.com) | [creaform3d.com](http://creaform3d.com)



Authorized Distributor